


GATE-GS SLIM

Gate-GS Slim is gate automatic solution with a glass leaf type. It is featured with smaller tube diameter insuring more elegant appearance. Along with standard dimensions, width and height of a glass can be enlarged. Motorized gates include all the features and functionality as listed bellow.



ELEGANT, LIGHT AND MINIMALISTIC PART OF ACCESS CONTROL SYSTEM



Key features:

- Extra slim gate post - only 101 mm;
- Appropriate addition to other TiSO turnstiles (waist-height and full-height);
- Steadfast housing suitable for high traffic areas;
- Can be integrated with any type of access control systems;
- Perfect Fusion of Affordability and High Quality;
- Left hand, right hand and double-sided opening are available;
- Gate housing could be adapted for both indoor and outdoor installations;
- Compatible with Ramped Base Mobile Platform (TiSO Frame-M);
- Extensive Array of Accessories for Customization;
- Wired Remote Control Included in Standard Kit;
- Fail-safe;
- Low Power Consumption.



Technical Specifications:


Model	Gate-GS Slim 650	Gate-GS Slim 900
Width, mm	724	975
Length, mm	150	
Height, mm	1000	
Passage width, mm	650	900
Mechanism	Servo-driven	
Blocking system	Single electromagnetic brake	
Operation mode	CW (100°) and CCW (100°)	
Emergency mode	Free exit/entry (gate is opening automatically)	
Power fail	Fail safe (gate could be opened manually — standard)	
MCBF, cycles	5 000 000	

Electrical Specifications:

Maximum power consumption, W	55
Voltage	From the AC (100-240)V, 50/60Hz; from a DC source 12 V

Finishing

Standard housing	Brushed SS AISI 304
Available housing	Brushed SS AISI 316; Polished SS AISI 304; Polished SS AISI 316; Powder coated RAL

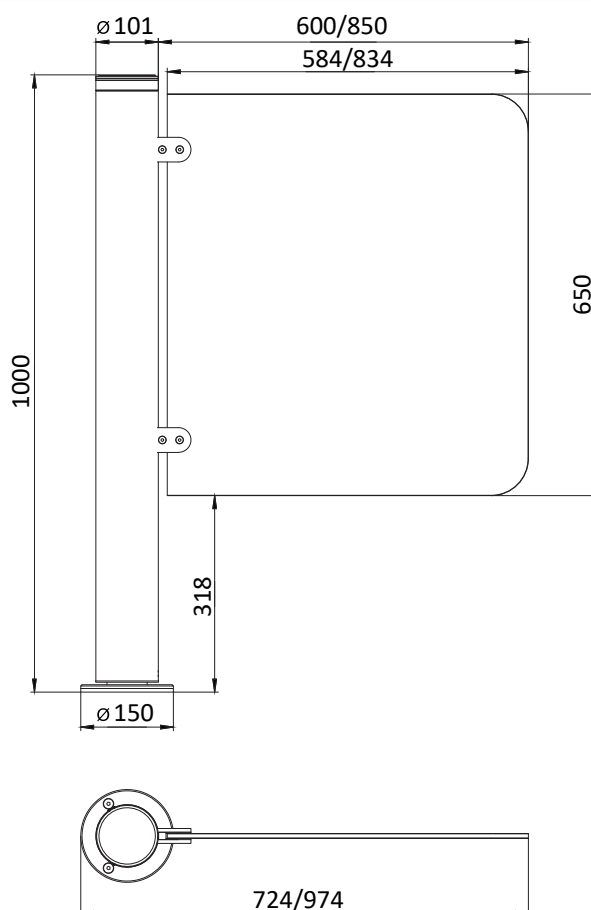

Specifications are subject to change without prior notice.

